



MYSON


TAW S6 CLASSIC

Hydronic

Technical information 04/07

- Rough in 3/4" copper
- Tube Diameter: 1.1/4"
- Dezincification Resistant Brass
- Open or Closed Loop System
- Modern Valves
- Sleeve Kit
- Recommended rough in from finished wall is 4 1/4" to 7 3/4"

S6 Technical Sheet

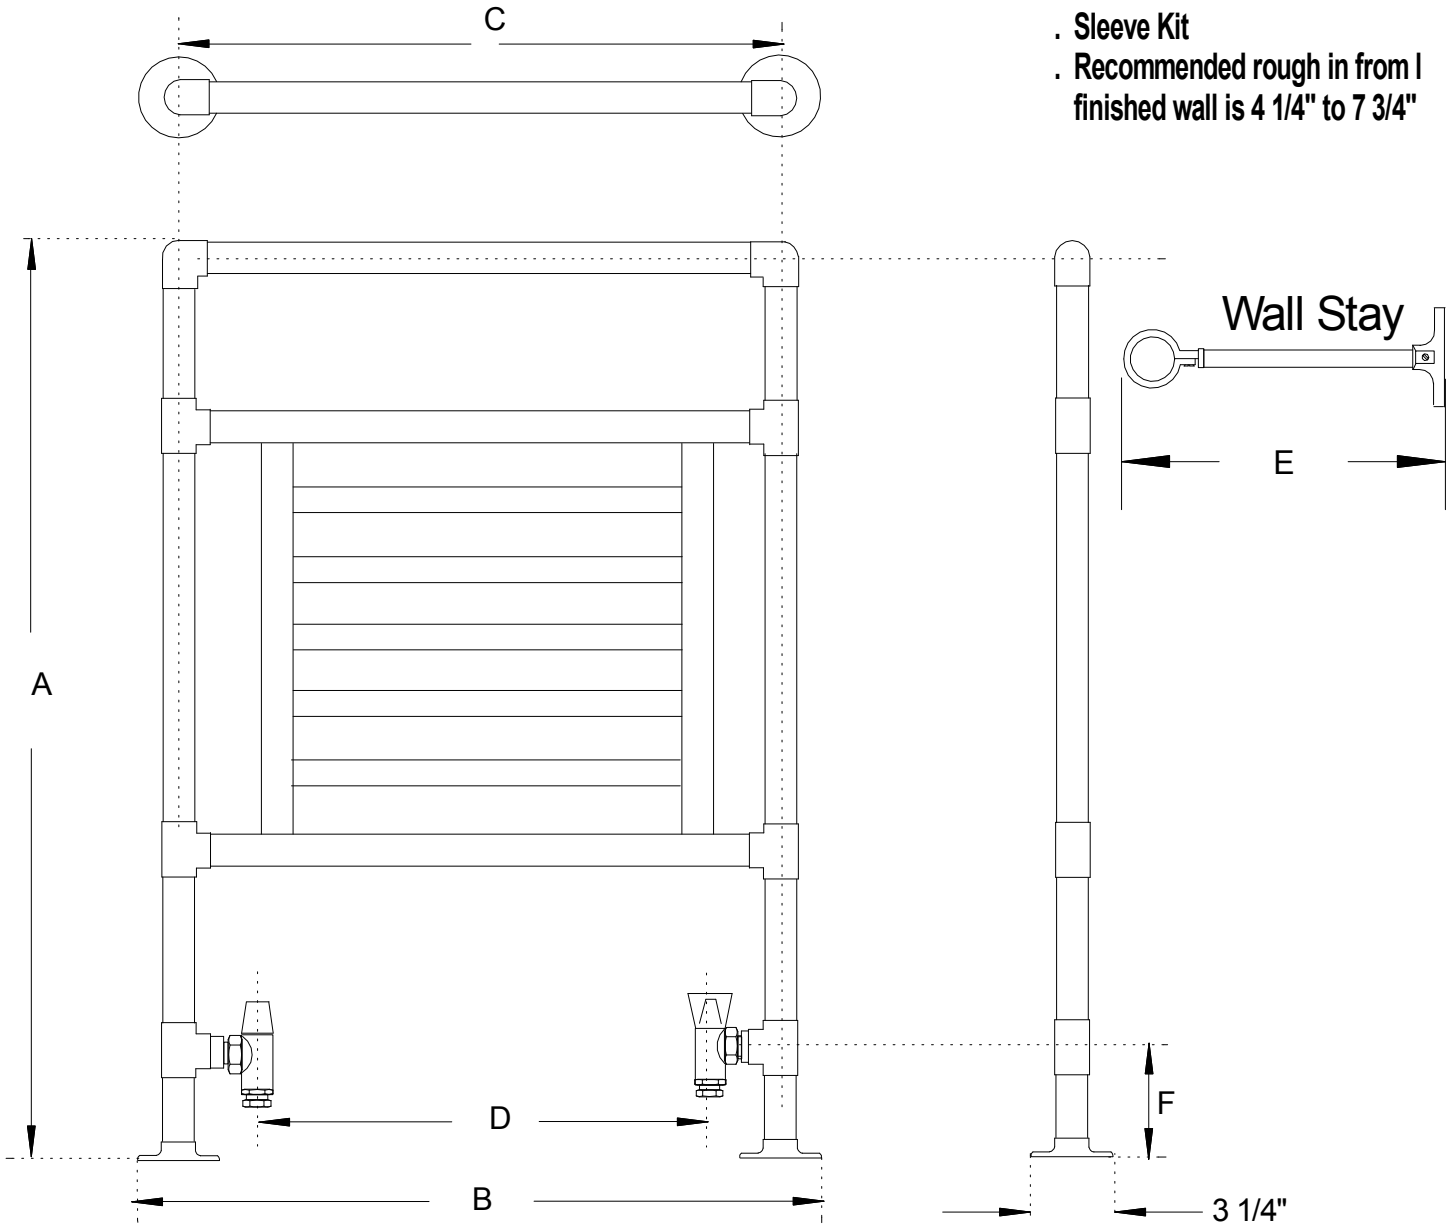

Model	A	B	C	D	E	F	BTU	Tube Dia
S6/1	36 5/8"	27 1/4"	24"	17 1/2"	3" - 7"	4 1/4"	1080	1 1/4"
S6/2	36 5/8"	33 1/4"	30"	23 1/2"	3" - 7"	4 1/4"	1152	1 1/4"